

UK switched socket



Schuko socket

### General specifications:

- Full line of wiring devices
- Plastic and metal finishes available to coordinate with Lutron controls
- 220 - 250 VAC, 50/60 Hz
- Compliant with all applicable IEC (CE) and BSI standards
- Gang framed versions with Lutron Rania® and Lyneo™ Wallbox dimmers

### Special features:

- Sockets with child protection
- Customisable 1- 2-port frame with snap in connectors: RJ11, RJ45, BNC jack etc.
- Screwless faceplates
- Durable polycarbonate plastic faceplates
- Precise colour consistency
- UV stable colour

**French (type E) socket**



**RN-RE16-X-IYY-Z**

16 A, 250 V~

(WxHxD) 86.1 x 86.1 x 30.7mm

**Schuko (type F) socket**




**RN-RS16-X-IYY-Z**

16 A, 250 V~

(WxHxD) 86.1 x 86.1 x 32mm

**UK switched socket**

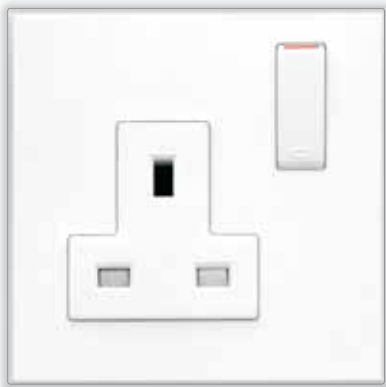


**RN-SRSU-X-FYYZ**

13 A, 250 V~

(WxHxD) 86.1 x 86.1 x 20.6mm

**Twin UK switched socket**

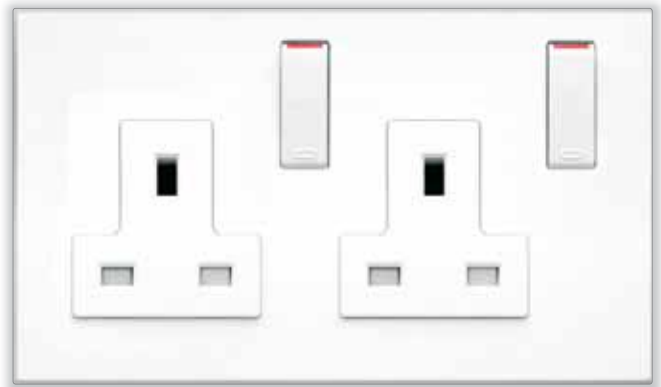


**RN-DRSU-X-FYYZ**

2 x 13 A, 250 V~

(WxHxD) 146.1 x 86.1 x 27.5mm

**UK round pin socket**

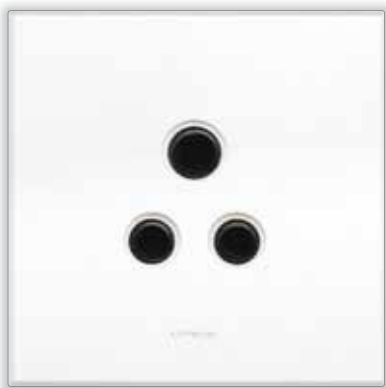

**RN-5AUK-X-FYY-Z**

5 A, 250 V~

(WxHxD) 86.1 x 86.1 x 19mm

**RJ-11 phone jack Cat 3**



**RN-RJ11-X-FYY-Z**  
(WxHxD) 86.1 x 86.1 x 26mm

**RJ-11 phone jack Cat 3**



**RN-RJ11-X-IYY-Z**  
(WxHxD) 86.1 x 86.1 x 26mm

**RJ-45 network jack Cat 5e**




**RN-RJ45-X-FYY-Z**  
(WxHxD) 86.1 x 86.1 x 26mm

**RJ-45 network jack Cat 5e**



**RN-RJ45-X-IYY-Z**  
(WxHxD) 86.1 x 86.1 x 26mm

**UK phone jack**

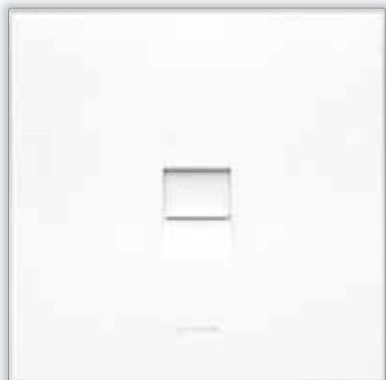

**RN-UKPJ-X-FYY-Z**  
(WxHxD) 86.1 x 86.1 x 12.5mm

**French phone jack**



**RN-FRPJ-X-IYY-Z**  
(WxHxD) 86.1 x 86.1 x 17.2mm

Sat jack



**RN-TF75-X-FYY-Z**

Type F, 75-Ohm  
(WxHxD) 86.1 x 86.1 x 11mm

Sat jack



**RN-TF75-X-IYY-Z**

Type F, 75-Ohm  
(WxHxD) 86.1 x 86.1 x 11mm

Triplexer – terminated



**RN-TRI1-X-IYY-Z**

5-2300 MHz, Loss  $\leq$  4 dB  
(WxHxD) 86.1 x 86.1 x 21mm


Triplexer – intermediate



**RN-TRI2-X-IYY-Z**

5-2300 MHz, Loss  $\leq$  7 dB  
(WxHxD) 86.1 x 86.1 x 21mm


Blank faceplate

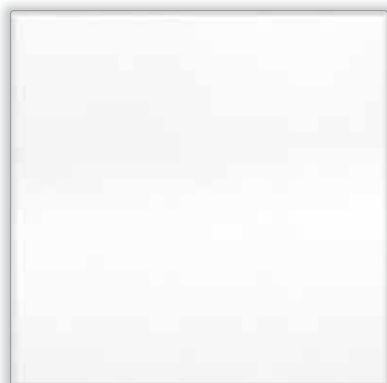

**RN-BLFP-X-FYY-Z**

(WxH) 86.1 x 86.1

Blank faceplate

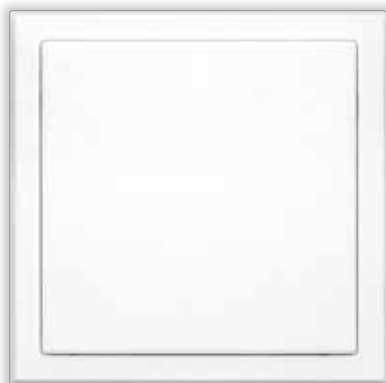

**RN-BLFP-X-IYY-Z**

(WxH) 86.1 x 86.1

# Lutron® | 1- 2-port frames and connectors

**1-port frame**



**RN-1PFR-X-FYY-Z**

(WxHxD) 86.1 x 86.1 x 11.0mm

**1-port frame**



**RN-1PFR-X-IYY-Z**

(WxHxD) 86.1 x 86.1 x 11.0mm

**2-port frame**



**RN-2PFR-X-FYY-Z**

(WxHxD) 86.1 x 86.1 x 4.0mm

**2-port frame**



**RN-2PFR-X-IYY-Z**

(WxHxD) 86.1 x 86.1 x 4.0mm

Use the 2-port frame/1-port frame with any snap connectors

Port frame	Depth of frame		
	RJ11/RJ45 connector	Coax cable F-style connector	Cable outlet module
RN-2PFR-X-FYY-Z	26mm	11mm	18mm
RN-1PFR-X-FYY-Z	26mm	11mm	18mm



**RJ-11  
connector**

Item Number	Colour
CON-1P-C3-WH	White
CON-1P-C3-BL	Black



**RJ-45  
connector  
Cat 5e**

Item Number	Colour
CON-1P-C5E-WH	White
CON-1P-C5E-BL	Black



**RJ-45  
connector  
Cat 6**

Item Number	Colour
CON-1P-C6-WH	White
CON-1P-C6-BL	Black



**Coax cable  
connector  
F-style,  
75 Ohm**

Item Number	Colour
CON-1C-WH	White
CON-1C-BL	Black



**BNC jack  
50 Ohm,  
BNC**

Item Number	Colour
CON-1B-WH	White
CON-1B-BL	Black



**MT-RJ  
fibre jack**

Item Number	Colour
CON-1F-MTRJ-WH	White
CON-1F-MTRJ-BL	Black



**SC simplex  
fibre jack**

Item Number	Colour
CON-1F-SC-WH	White
CON-1F-SC-BL	Black



**LC fibre  
jack  
Non-flush  
mount**

Item Number	Colour
CON-1F-LC-WH	White
CON-1F-LC-BL	Black



**ST fibre  
jack**

Item Number	Colour
CON-1F-ST-WH	White
CON-1F-ST-BL	Black



**Cable outlet  
module  
Cable outer  
diameter range  
1.8 to 8mm**

Item Number	Colour
CON-COTL-WH	White
CON-COTL-BL	Black

Single switch



**RN-SS10-X-FYY-Z**

2-way, 10 AX 250 V~  
(WxHxD) 86.1 x 86.1 x 20.5mm


Single switch



**RN-SS10-X-IYY-Z**

2-way, 10 AX 250 V~  
(WxHxD) 86.1 x 86.1 x 20.5mm


Dual switch

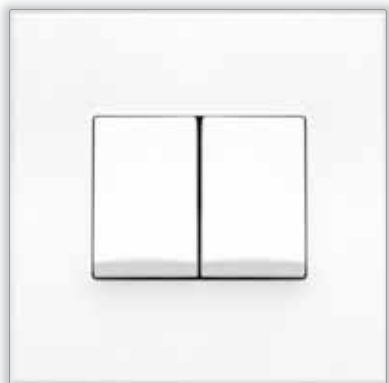

**RN-DS10-X-FYY-Z**

2-way, 2 x 10 AX 250 V~  
(WxHxD) 86.1 x 86.1 x 20.5mm

Dual switch

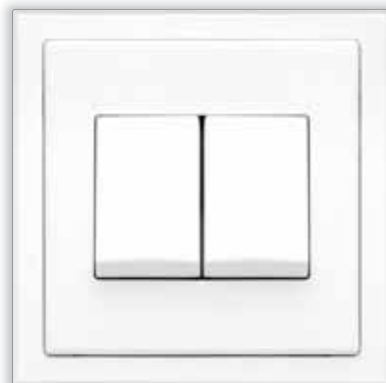

**RN-DS10-X-IYY-Z**

2-way, 2 x 10 AX 250 V~  
(WxHxD) 86.1 x 86.1 x 20.5mm

**Intermediate switch**



**RN-IS10-X-FYYZ**

Intermediate, 10 AX 250 V~  
(WxHxD) 86.1 x 86.1 x 23.6mm

**Intermediate switch**



**RN-IS10-X-IYY-Z**

Intermediate, 10 AX 250 V~  
(WxHxD) 86.1 x 86.1 x 23.6mm

**Dual intermediate switch**



**CPW0732-FYY**

2 x 10 AX 250 V~  
(WxHxD) 86.1 x 86.1 x 23.6mm

**Dual intermediate switch**



**CPW0732-IYY**

2 x 10 AX 250 V~  
(WxHxD) 86.1 x 86.1 x 23.6mm

**Single momentary switch**



**CPW0854-FYY**

10 AX 250 V~

For use with step/impulse relay  
(WxHxD) 86.1 x 86.1 x 22.0mm

Starting July 1, 2008, use  
RN-SM10-X-FYY-Z

**Single momentary switch**




**CPW0854-IYY**

10 AX 250 V~

For use with step/impulse relay  
(WxHxD) 86.1 x 86.1 x 22.0mm

Starting July 1, 2008, use  
RN-SM10-X-IYY-Z

**Dual momentary switch**

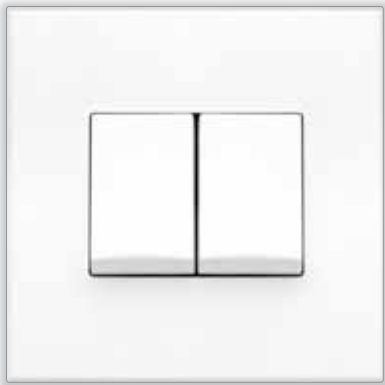


**CPW0855-FYY**

2 x 10 AX 250 V~

For use with step/impulse relay  
(WxHxD) 86.1 x 86.1 x 22.0mm

Starting July 1, 2008, use  
RN-DM10-X-FYY-Z

**Dual momentary switch**

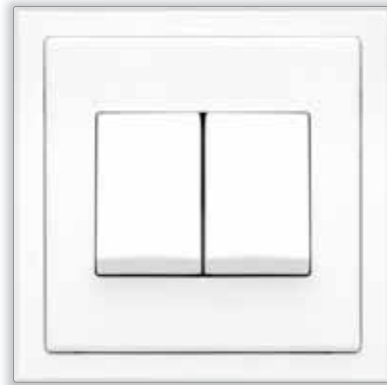

**CPW0855-IYY**

2 x 10 AX 250 V~

For use with step/impulse relay  
(WxHxD) 86.1 x 86.1 x 22.0mm

Starting July 1, 2008, use  
RN-DM10-X-IYY-Z

Shutter R/L switch



**CPW0856-FYY**

10 A 250 V~

(WxHxD) 86.1 x 86.1 x 23.6mm

Shutter R/L switch



**CPW0856-IYY**

10 A 250 V~

(WxHxD) 86.1 x 86.1 x 23.6mm

## 1-gang frame




**RN-1GANG-X-YY-Z**  
(WxH) 86.1 x 86.1

## 2-gang frame



**RN-2GANG-X-YY-Z**  
(WxH) 157.1 x 86.1

## 3-gang frame

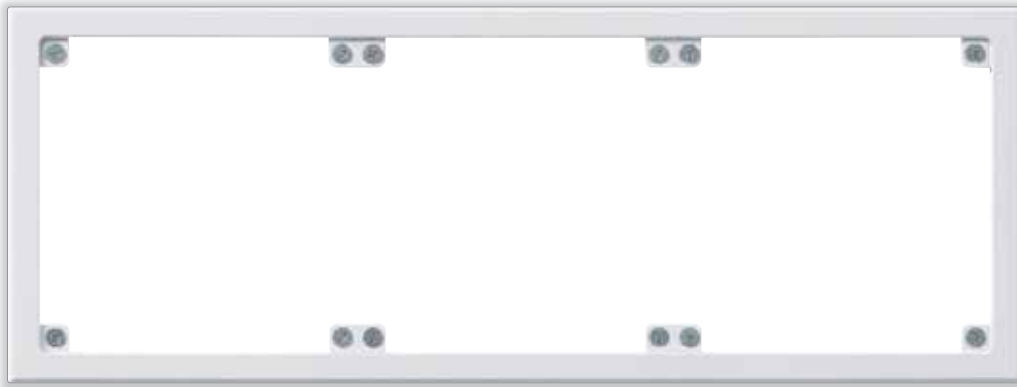

**RN-3GANG-X-YY-Z**  
(WxH) 228.1 x 86.1

## Trim ring



• available in Arctic White, Argentum, Mica and Black only


**RN-TRRG-X-YY-Z**  
(WxHxD) 86.1 x 86.1 x 13.1mm

Trim ring compatibility chart		UK backbox depth	
Item	Description	16mm	25mm
LSSI-501	Lyneo STO	✗	✓
LSDI-251	Lyneo dual STO	✗	✓
LNSI-502	Lyneo preset	✗	✓
LLSI-502	Lyneo preset with status light	✗	✓
LLSM-502	Lyneo preset with status light	✗	✓
LLDI-252	Lyneo dual preset with status light	✗	✓
RNSU-452	Rania digital dimmer	✓	✓
RNDU-252	Rania dual digital dimmer	✗	✓
RDSU-452	Rania accessory dimmer	✓	✓
RDDU-252	Rania dual accessory dimmer	✗	✓
RISU-452	Rania IR remote control digital dimmer	✓	✓
RIDU-252	Rania IR dual remote control digital dimmer	✗	✓
RN-SS10	Single switch	✓	✓
RN-DS10	Dual switch	✓	✓
RN-IS10	Intermediate switch	✓	✓

STO = Slide to Off ✓ = Compatible ✗ = Not compatible


## how to build a model number

### RN-SS10-X-SYY-Z

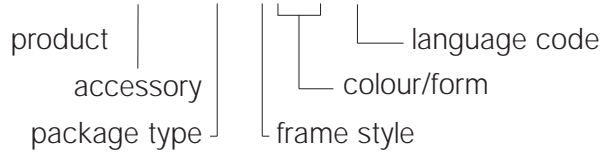

### Example:

### RN-SS10-B-FAW-M

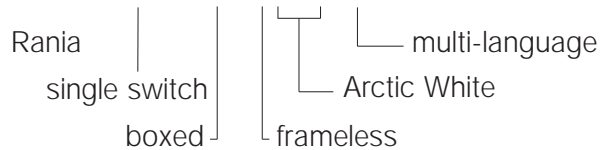

### X = Package type

B = Boxes

H = Hanging clamshell

### YY = Colour/finish

AW = Arctic White

AR = Argentum

MC = Mica

SN = Satin Nickel

SB = Satin Brass

SC = Satin Chrome

BN = Bright Nickel

BB = Bright Brass

BC = Bright Chrome

AU = Gold Plated

QB = Antique Brass

QZ = Antique Bronze

### S = Frame style

F = Frameless

I = Metal frame/metal insert

B = Black frame/metal insert

### Z = Language code

For boxes select:

M = Multi-language


For hanging clamshells:

E = English


S = Spanish/French/Portuguese

C = Chinese

## dimensions

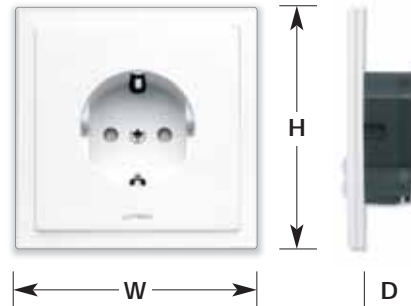

## colour options



Arctic White (AW)



Argentum (AR)



Mica (MC)

### Metals



Satin Nickel (SN)



Satin Brass (SB)



Satin Chrome (SC)



Bright Nickel (BN)



Bright Brass (BB)



Bright Chrome (BC)



Gold Plated (AU)



Antique Brass (QB)



Antique Bronze (QZ)

Other colours and finishes available upon request.

 **LUTRON**  
LIGHTING CONTROLS

Lutron Electronics Co., Inc.

©06/2008 Lutron Electronics Co., Inc.

[www.lutron.com/europe](http://www.lutron.com/europe)

[www.lutron.com/asia](http://www.lutron.com/asia)

P/N 367-1320/EA REV B